

## SfAR-S-6RO

**SfAR-S-6RO** is designed to be applied wherever it is necessary to switch up to an 8 A load.

The module has 6 **relay outputs** (RO). Relay outputs are double-throw contact types, offering both normally open (**NO**) and normally closed (**NC**) types at the same time.

A built-in **RS485** interface allows easy connection over the **Modbus RTU/ASCII** protocol. A 32-bit ARM core processor provides fast processing and communication.

The module is equipped with a set of **LEDs** used to indicate the status of I/O, power supply, and RS485 communication.

Configuration of the modules is carried out with our free software, the **SfAR Configurator**. A built-in mini **USB** allows performing a primary configuration of the unit without an additional power supply.

The modules have been equipped with the Quick Connector system to simplify installation. Using a dedicated SfAR-S-LINK cable allows for connecting up to 10 modules, which provide both RS485 communication and an external power supply.

#### **Key Features**

- 6 galvanic isolated relay outputs
- Separate contacts for NC and NO options
- Up to an 8 A load on each output
- Watchdog function
- Built-in LEDs for device status indication
- Modbus RTU/ASCII communication
- Baud rate: 2400 bps to 115200 bps
- Up to 128 modules on the bus
- Built-in mini USB type B port for configuration
- Space-saving housing, DIN rail mount
- DIP switch for configuration
- Quick Connector for grouping modules and providing power and communication





iSMA CONTROLLI S.p.A. - Via Carlo Levi 52, 16010 Sant'Olcese (GE) - Italy | support@ismacontrolli.com

# SfAR-S-6RO

### Specification

#### Relay Outputs (RO)

- Selectable NO/NC relay output
- Resistive load AC1: 8 A @ 230 V AC or 8 A @ 30 V DC
- Inductive load AC3: 360 V A @ 230 V AC or 60 W @ 30 V DC

#### Platform

• ARM Cortex-M3

#### Communication

- RS485 interface
- Up to 128 devices on the bus
- Modbus RTU/ASCII
- Baud rate: 2400 to 115200 bps
- Mini USB type B
- Quick Connector system
- Built-in LED indicators
- Free software: SfAR Configurator

#### **Power Supply**


• 10-38 V DC; 10-28 V AC

#### Housing

- Dimensions WxHxD: 22,7x110,9x119,1 mm (0.894x4.366x4.689 in)
- Construction: UL approved, self-extinguishing plastic (PC/ABS)
- DIN rail mounting DIN (DIN EN 50022 norm)
- Cooling: internal air circulation

#### Environment

- Operating temperature: -10°C to 50°C (14°F to 122°F)
- Storage temperature: -40°C to 85°C (-40°F to 185°F)
- Relative humidity: 5% to 95%, no condensation
- Ingress protection rating: IP40 for indoor installation

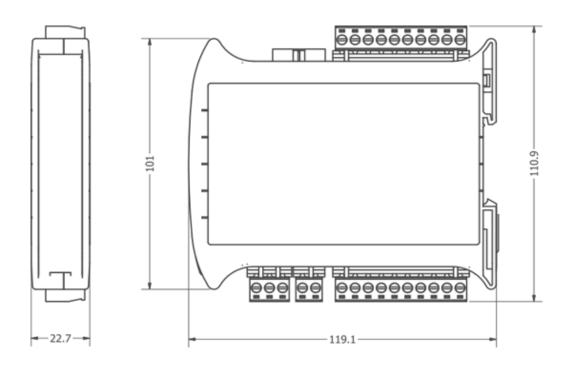

iSMA CONTROLLI S.p.A. – Via Carlo Levi 52, 16010 Sant'Olcese (GE) - Italy | support@ismacontrolli.com

