

Comfort & Indoor Air Quality

Temperature and Ambient Humidity Sensor with display

TX T&H AMB E-INK 600-052



- Ambient temperature & humidity measurement
- 2.13" e-ink display for data visualization
- LoRaWAN & proprietary LoRa compatible
- High capacity C-type battery
- Up to 5 years battery life
- Very long radio range



Technical Specifications

Physical Characteristics

Protection rating	IP40
Mounting	Wall-mounted via screws or 3M (provided with the sensor)
Operating temperature	- 20 / + 55°C
Power supply	3.6V Lithium C-type battery - Replaceable battery USB power supply possible (USB-C)
Battery life	4 years for transmission every 15 minutes (SF9)
Display type	2.13" e-ink
Detachment detection	Accelerometer

Radio

Supported protocols	LoRaWAN (Class A) and Enless proprietary LoRa
Frequency	EU868
Addressing	LoRaWAN = DEVEUI, APPEUI, APPKEY (OTAA) Enless proprietary LoRa = Enless LoRa ID
Encryption	LoRaWAN = AES128 Enless proprietary LoRa = No encryption
Transmission power	25mW (14 dBm)

Measurements

Temperature

Sensor measurement range -40 / + 125°C

Sensor accuracy +/- 0,2°C

Sensor resolution 0,1°C

Humidity

Sensor measurement range 0 - 100% rH



Sensor accuracy +/- 2% rH

Sensor resolution 0,1% rH

Certifications



Dimensions (mm)

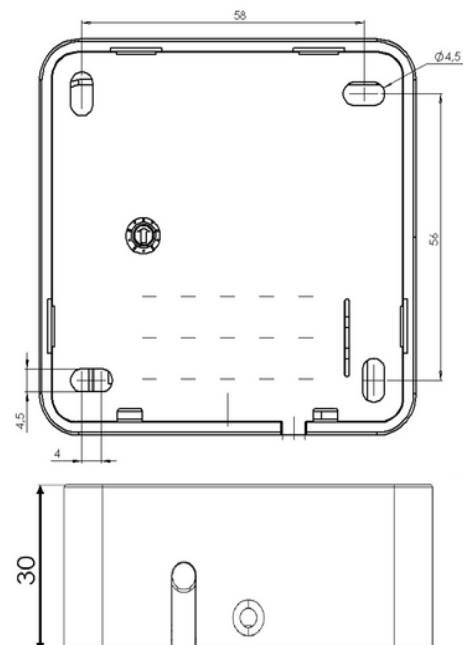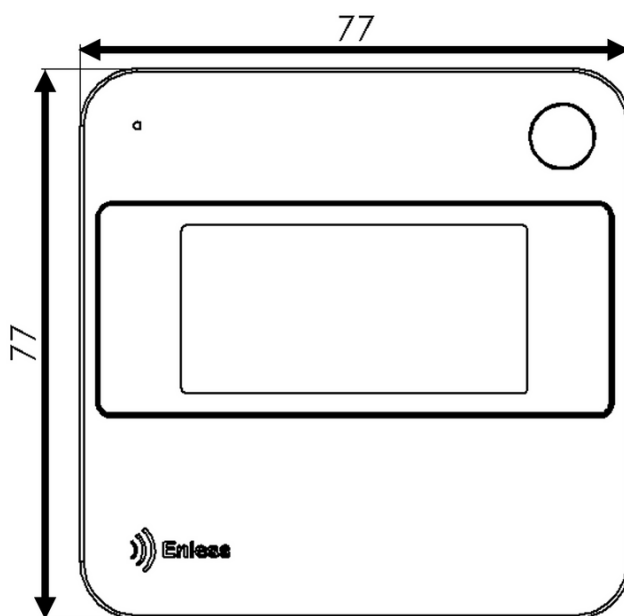

V 2.0